

WT600S-65 Basic Speed –Variable Peristaltic Pump

WT600S-65 Basic Speed –Variable Peristaltic Pump Introduction

This pump adopts DC brushless motor drive which is large torque, free maintenance, can cascade four pump heads .Has basic functions such as reversible direction, start/stop, full speed (fast cleaning) and adjust speed. Control the start/stop, reversible direction, adjusts the speed via external analog quality, and adds the time dispensing function.RS485 interface, as adopting the MODBUS communication protocol, the pump is easier to be connected with other equipments, such as computer, human machines interface and PLC.

Function and Feature



- Four-figure digital LED indicator display working speed.
- The LED indicator displays the internal, external control, footswitch etc working modes.
- Mask keypad operation.
- Reversible direction, start/stop, adjust speed and full speed, state memory (power –down memory).
- Easy dispensing functions, it realizes the repeat timing quantitative dispensing liquid
- Can drive multi-channels and various types of pump heads.
- Speed resolution is 1rpm, speed range is 30-600rpm, flow accuracy is 3%.
- Stainless steel housing, easy to clean, excellent resistance to the corrosion of the acid ,alkali ,sodium and the organic solvents.
- The circuit board with conformal coating makes it dust-proof and moisture-proof.
- Super anti-interference feature, wide input voltage range, acceptable for the complex power environment.
- External high –low electrical level controls the start/stop, reversible direction and easy dispensing function, optically coupled isolator; external analog adjusts the rotate speed.
- RS485 interface , MODBUS protocol is available ,easy to connect with other equipments.
- Optional footswitch or timer for dispensing fluid.
- The IP grade is IP65. The housing adopts full seal design, suitable for more harsh environment application, such as high humidity or water sputtering place.

Technical parameters:

- Flow range :3-6000ml/min
- Flow accuracy:<3%
- Speed range:30-600rpm.
- Speed resolution :1rpm
- Power supply :AC 220V±10%,50Hz/60Hz (standard) ,
AC 110V±10%,50Hz/60Hz (optional)
- Power consumption: <200W
- External control: Input electrical level 5V,12V(standard),24V(optional).


External control analog 0-5V(standard),0-10V,4-20mA(optional)

- External communication interface: RS485 communication interface, support the MODBUS protocol.
- Ambient temperature: 0 ~ 40°C
- Relative humidity:<80%
- IP grade:IP65
- Dimensions (LxWxH) 286mmx180mmx230mm
- Weight: 6.2KG

WT600S-65 Applicable pump head and tubing, flow parameters

Drive type	Pump head	Channel number	Tubing (mm)	One channel flow rate (ml/min)
WT600S-65 (304SS)	YZ15	1,2,4	13#14#16#19#25#17#18#	3.33~2300
	YZ25	1,2,4	15#24#	50~1700
	KZ25	1,2	15#24#35#36#	80~6000

WT600S-65 Pictures of applicable pump head:

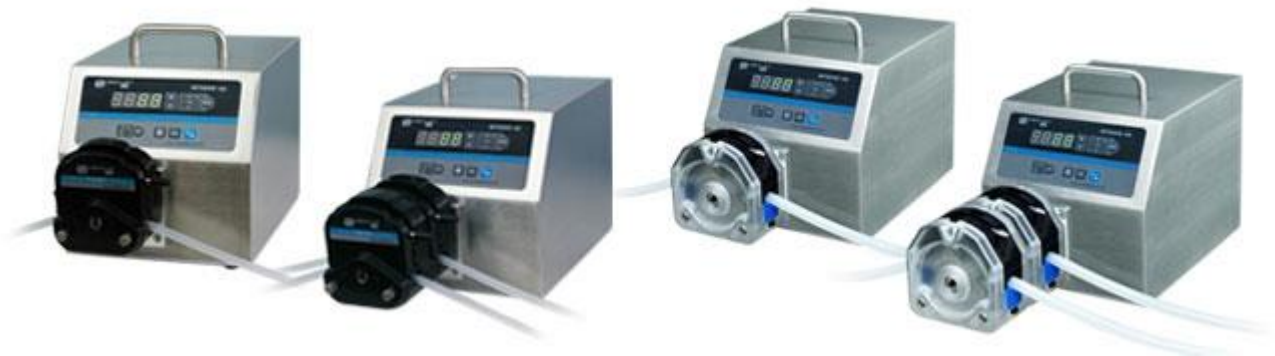

YZ15

2×YZ25

KZ25

2×KZ25

Appearance size:

